

# **2x4 HDMI Splitter**

## **User Manual**

**Ver. 1.00**

**All brand names and trademarks are properties of their  
respective owners.**

## ***Features and Specification***


- Two HDMI inputs, four HDMI outputs
- HDMI 1.3b compatible
- Supports signal rate up to 2.25Gbps
- Supports 12-bit Deep Color 1080p
- HDCP compliant
- Easy installation
- LED indicators
- Metal case

## ***Package Contents***

- One 2x4 HDMI Splitter
- One Power Adapter
- One User Manual
- Mounting ears (optional)


Note: Contents may vary depending on country/market.

## *Hardware Layout*

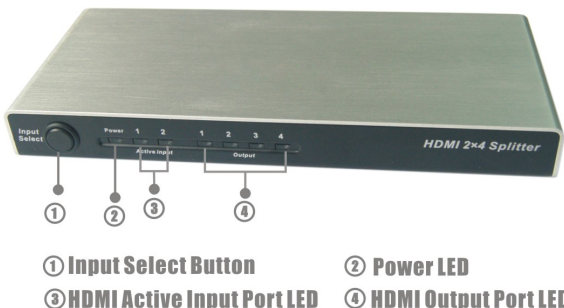

*Figure 1. Front Panel Layout*

- **Input Select Button:** Press this button repeatedly to cycle through to the desired input device
- **Power LED:** This LED indicator will become active when the HDMI splitter is powered on
- **HDMI Active Input Port LED (1-2):** This indicates which inputs port is currently selected as output
- **HDMI Output Port LED (1-4):** This LED indicator will become active when a valid HDMI display is connected to the corresponding HDMI output port

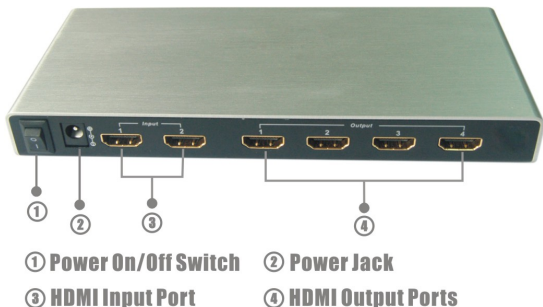

***Figure 2. Rear Panel Layout***

- **Power On/Off Switch:** Power on/off the HDMI splitter
- **Power Jack:** Connect to the included power adapter
- **HDMI Input Port (1-2):** This is the input for the HDMI source device. When a valid source is detected by the HDMI splitter, the link LED will activate
- **HDMI Output Port (1-4):** Connect up to 4 HDMI displays to these output ports

## ***Hardware Installation***

1. Connect HDMI cable(s) to the output port from the HD media source and the input port(s) from HDMI splitter.
2. Connect HDMI cables to the input ports of your HD TVs or displays and the output ports of the HDMI splitter.
3. Plug the power adapter into the power jack of the HDMI splitter.
4. Plug the power adapter into a reliable power outlet.
5. Turn on the power switch, and ensure that the power LED indicator is active.